

THIS IS ISSUED IN STRICT CONFIDENCE THAT IT IS NOT USED AS A BASIS FOR MANUFACTURE OR SALE AND THAT IT IS NOT COPIED, REPRINTED OR DISCLOSED TO A THIRD PARTY EITHER WHOLLY OR IN PART WITHOUT THE PRIOR WRITTEN CONSENT OF CAL TEST ELECTRONICS, INC.


- DO-IT-YOURSELF (DIY) 4mm STACKING BANANA PLUG, BUTTON ATTACHMENT (SOLDERLESS).
- SPECIFICATIONS:
 INSULATOR BODY: POLYAMIDE (NYLON)
 PLUG BODY: BRASS, NICKEL PLATED
 CONTACT SPRING: BERYLLIUM COPPER ALLOY, NICKEL PLATED
- RATING:
 IEC: <33 V AC / <70 V DC
 VOLTAGE: 1,200 V NON-HANDHELD
 CURRENT: 36 A MAX.
 TEMPERATURE: -20° C TO +80° C.
- MAXIMUM WIRE SIZES:
 CONDUCTOR: $\varnothing.090$ (12AWG)
 INSULATION: $\varnothing.156$ (5/32")
 STRIP LENGTH: .25 (6.4)

MODEL NUMBER


CT2016-#

- COLOR: 0 - BLACK
 2 - RED
 4 - YELLOW
 5 - GREEN
 6 - BLUE
 9 - WHITE

REVISIONS			
REV.	DESCRIPTIONS	DATE	APPROVED
-	CLASS A RELEASED	7/11/99	
A	UPDATED FORMAT w/ CAGE CODE	4/18/04	

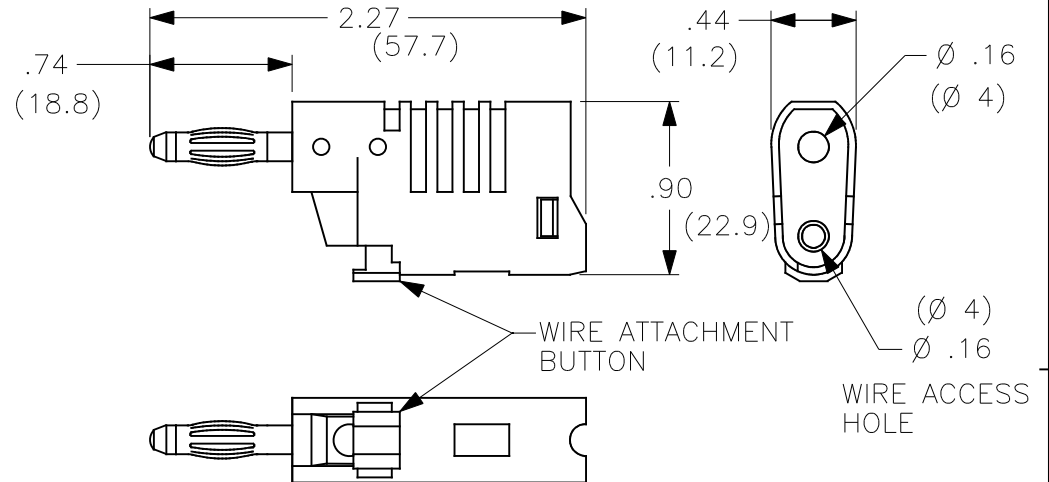

THIRD ANGLE PROJECTION



UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
 TOLERANCES ARE:
 FRACTIONS DECIMALS
 $\pm 1/32$.XX $\pm .02$
 .XXX $\pm .005$
 DO NOT SCALE DRAWING

CONTRACT NO.

APPROVALS	DATE
DRAWN WDH	7/11/99
CHECKED	
ENGR.	
DESIGN ACTIVITY	

Cal Test Electronics

22820 Savi Ranch Parkway
 Yorba Linda, CA 92887-4610

TITLE
**DIY 4mm STACKING PLUG,
 BUTTON ATTACHMENT**

SIZE A	CAGE CODE 43F45	DWG. NO. P201600	REV. A
SCALE 1:1	SHEET 1 OF 1		

MATERIAL	
FINISH	
NEXT ASSY	USED ON
APPLICATION	